
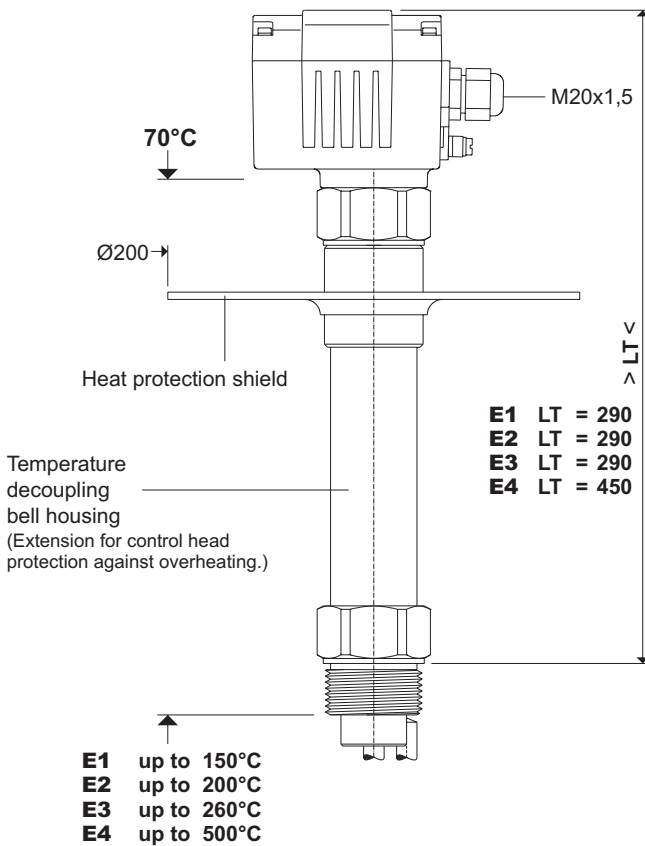



### Full, empty and demand indicator for vertical mounting with protecting cage

Signal contact	2 A / 250V AC potential-free
Type of protection	IP66 in accordance with DIN EN 60529
Maintenance	none

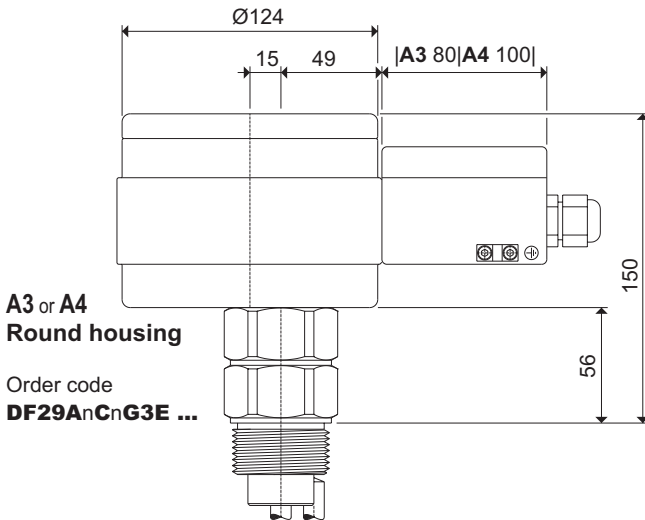

### A1 or A2 Compact housing

Order code  
**DF29AnCnG3AT1V**

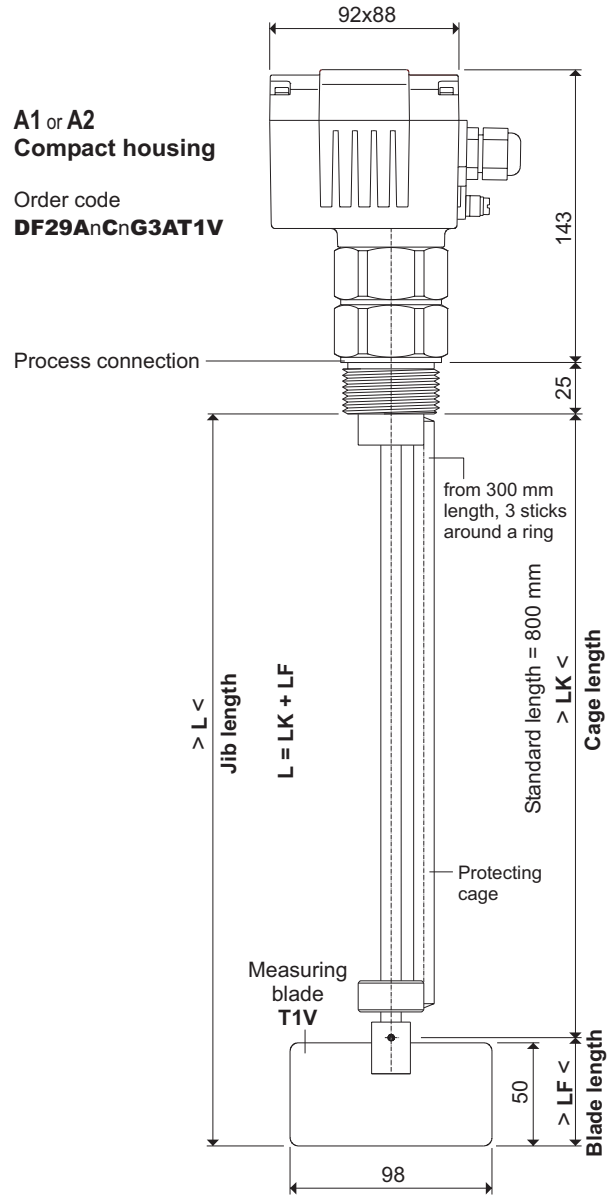

You will find further technical details  
under appliance information **DF-GI-...**

