


Full, empty and demand indicator

for any mounting position
with circulating measuring blade, absolutely tight !

Signal contact	2 A / 250V AC potential-free
Type of protection	IP66 in accordance with DIN EN 60529
Maintenance	none

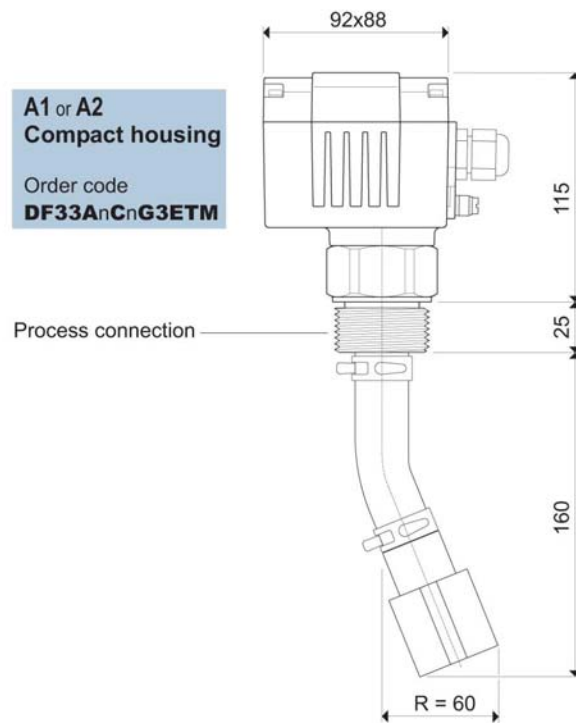

You will find further technical details
under appliance information **DF-GI-..**

