



2 way stainless steel ball valve coupled with quarter-turn electrical actuator "EK"

Threaded type

Technical specification of actuator

Quarter-turn (90°) electrical actuator EK

Power supply : 230 V AC
24 V AC/DC

Duty rating : 30%

Protection : IP 65

Operating temperature : -10 ... 55 °C

Output switch : 4 SPDT micro switch

Mounting pad : ISO 5211 / DIN 3337



Technical specification of valve


Type : 2 pieces stainless steel ball valve

Body material : stainless steel AISI 316

Seat : PTFE

Operating pressure : PN 63

Operating temperature : -25 ... +180 °C

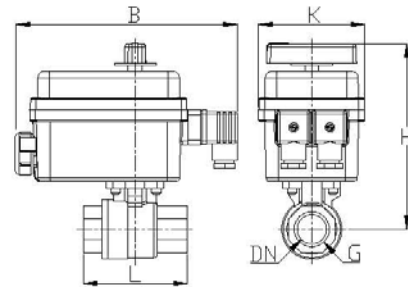

Valve size (G)	Actuator	PN	DN	L	B	H	K	Kg
1/4"	EK20	63	8	50	189	157	92	
3/8"	EK20	63	10	50	189	157	92	
1/2"	EK20	63	15	56	189	157	92	
3/4"	EK20	63	20	73	189	161	92	
1"	EK35	63	25	82	188	220	128	
1 1/4"	EK35	63	32	91	188	229	128	
1 1/2"	EK60	63	40	104	188	234	128	
2"		63	50	120				
2 1/2"		63	65	155				
3"		63	80	182				

ARYAN PAJOUHESH ENG. Co.

1st Floor , No. 39 , 27th St. , Kordestan Exp.

Zip Code: 1437747191 , Tehran – IRAN

Tel.: +98 (21) 88335507-10

Fax: +98 (21) 88010484

Email: info@aryanpajouhesh.com

شرکت آریان پژوهش

تهران- بزرگراه کردستان , خیابان ۲۷ غربی ,

پلاک ۳۹ , طبقه اول کدپستی ۱۴۳۷۷۴۷۱۹۱

تلفن : ۸۸۳۳۵۵۰۷-۱۰

فاکس : ۸۸۰۱۰۴۸۴